


## Server Motherboard

# CA-SZF-4L

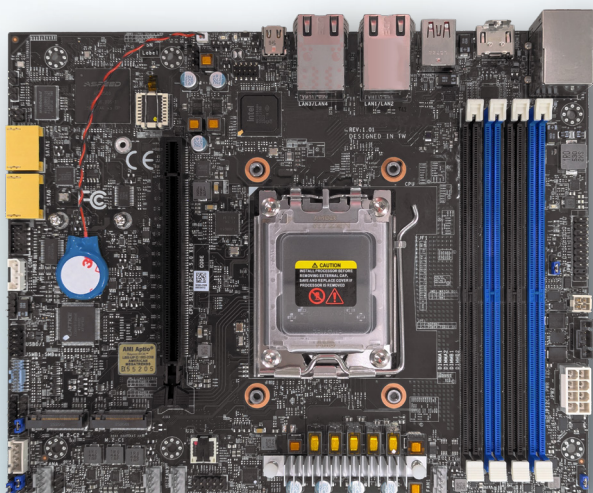

⚠ Product details and images may change without notice.

### KEY FEATURES

- 9" x 7.25" FlexATX
- AMD EPY 4005/4004 series or Ryzen 9000/7000 series processor
- DDR5 5600MT/s 192GB
- 4 x GbE LAN Ports Intel® Ethernet Controller I350

#### MAIN BOARD

|             |            |
|-------------|------------|
| Form Factor | FlexATX    |
| Dimension   | 9" x 7.25" |

#### PROCESSOR

|         |                                                                          |
|---------|--------------------------------------------------------------------------|
| CPU     | AMD EPY 4005/4004 series or Ryzen 9000/7000 series processor, socket AM5 |
| CPU TDP | Up to 170W                                                               |

#### SYSTEM MEMORY

|                |                                                            |
|----------------|------------------------------------------------------------|
| Memory         | 1 x DDR5 up to 5600MT/s 192GB, support ECC UDIMM in 4 slot |
| Memory Voltage | 1.1V                                                       |

#### PCIe

|                  |                                                                         |
|------------------|-------------------------------------------------------------------------|
| Full-length Slot | 1 x PCIe 5.0 x 16 slot, support x 16 or x8x8                            |
| M.2 Slot         | 1 x M.2 M Key (22110) PCIe 5.0 x 4<br>1 x M.2 M Key (2280) PCIe 5.0 x 4 |

#### CONNECTOR

|                 |                                                |
|-----------------|------------------------------------------------|
| Fan Connector   | 4 x fan header (dual cooling zone)             |
| Power Connector | 12 DC input: 8 pin (2x4) & 4 pin ATX connector |

#### INPUT/ OUTPUT

|             |                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Networking  | 4 x GbE LAN ports thru Intel I350-AM4 LAN chip                                                                                                                                                                                                                                     |
| Video       | 1 x HDMI 2.1<br>1 x USB type C (DP)<br>1 x mini-DP thru AST2600                                                                                                                                                                                                                    |
| USB         | 2 x USB 3.2 Gen2 type A (Rear)<br>1 x USB 3.2 Gen1 type A (Rear)<br>1 x USB 3.2 Gen2 type C *(1) (Rear)<br>2 x USB 2.0 thru internal header<br>*(1). The same physical USB Type C port listed in the video section supports both DisplayPort (DP) and USB 3.2 Gen 2 data transfer. |
| SATA        | 2 x SATA3 6Gb/s ports                                                                                                                                                                                                                                                              |
| Serial Port | 1 x RS-232 header                                                                                                                                                                                                                                                                  |
| TPM 2.0     | Onboard                                                                                                                                                                                                                                                                            |
| Management  | 1 x BMC via RJ45 (support CPLD remote AC on/off, remote clear CMOS)<br>IPMI 2.0 w/dedicated LAN                                                                                                                                                                                    |

#### CERTIFICATIONS

CE/FCC Class B

**Compuware Technology Inc.**

Tel: 886-2-8226-3936 Address: 5F., No. 232, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)



[www.compuware-us.com](http://www.compuware-us.com)